


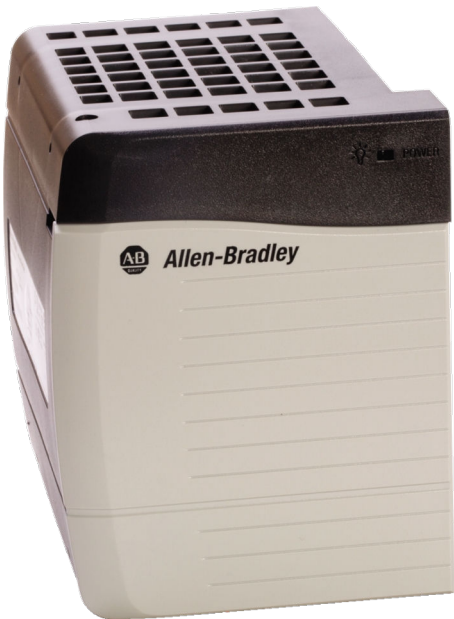

Representative Photo Only  
(actual product may vary based on configuration selections)

ControlLogix Power Supply Redundant 85-265V AC

- All regulated voltages necessary for any ControlLogix® module to operate in the chassis
- Limited hold-up time for fluctuations in incoming line power
- Enables orderly system shutdown by signaling modules in the chassis of imminent voltage failure
- conformal coated options are available - contact NHP for further information

| SPECIFICATIONS                          |                                                                                                                                                                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Series                          | ControlLogix (Bul. 1756 / 1757)                                                                                                                                                                                               |
| Component Type PLC & I/O                | Power Supply                                                                                                                                                                                                                  |
| Operating Temperature, Max              | 60 °C max                                                                                                                                                                                                                     |
| Operating Temperature, Min              | 0 °C min                                                                                                                                                                                                                      |
| Storage Temperature, Max                | 85 °C max                                                                                                                                                                                                                     |
| Storage Temperature, Min                | -40 °C min                                                                                                                                                                                                                    |
| Relative Humidity, Max                  | 95 %RH                                                                                                                                                                                                                        |
| Vibration Acceleration (Max.)           | 2 m/s²                                                                                                                                                                                                                        |
| Vibration Frequency, Operational (Max.) | 500 Hz                                                                                                                                                                                                                        |
| Standards Compliance                    | IEC 60068-2-1<br>IEC 60068-2-14<br>IEC 60068-2-2<br>IEC 60068-2-27<br>IEC 60068-2-30<br>IEC 60068-2-6<br>IEC 61000-4-11<br>IEC 61000-4-2<br>IEC 61000-4-3<br>IEC 61000-4-4<br>IEC 61000-4-5<br>IEC 61000-4-6<br>IEC 61000-6-4 |
| Certifications                          | ATEX<br>CE<br>CSA<br>FM<br>KC (KCC)<br>C-UL-US<br>RCM                                                                                                                                                                         |

Catalogue No: **1756-PA75R**

**CONTROLLOGIX 85-265V AC 13A REDUNDANT POWER SUPPLY**

Automation Systems > Modular Programmable Controllers > Large PLC Systems > Allen-Bradley ControlLogix® > ControlLogix® Power Supplies



| REFERENCES                                  |   |
|---------------------------------------------|---|
| IECEX Certificate                           | - |
| Supplier Declaration of Conformity:         | - |
| Installation Guide:                         | - |
| User Manual:                                | - |
| Manufacturer Datasheet:                     | - |
| Manufacturer Catalogue & Product Selection: | - |