

20A single phase

SL20.110/.111

- Input: AC 115/230V Auto Select
- Output: 24...28V / 480W (600W)
- 90% Efficiency
- Ideal for parallel operation
- Overload behaviour adjustable!
(Continuous current / Hiccup)



PULS

CB
scheme
IEC60950

cUL US
UL508 LISTED
IND. CONT. EQ.
18 Wm, 60°C

CUL US
UL60950 E137006
CUL/CSA-C22.2
No 60950

**Type approval
acc. to:**

- IEC / EN60950
- EN50178
- Overvolt. cat. III
- EN60204

CE
EMC and
Low Volt.
Directive

Data sheet

Input

Input voltage	AC 100-120V/200-240V, 47-63Hz Auto Select
Rated tolerances	
• Continuous operation	AC 85-132V resp. AC 184-264V
• Short-term (1 min) at 24V/20A	AC 85-140V resp. AC 170-280V
Input current I_n	<10A (115V range) <5A (230V range)
Inrush current limiting with active bypass of the limiting resistor (NTC).	
Inrush current I_{pk}	<18A at AC 264V ($T_{amb} = +25^\circ\text{C}$, cold start) <37A at AC 264V ($T_{amb} = +50^\circ\text{C}$, cold start)
Fuse loading I^2t	<5A ² s ($T_{amb} = +25^\circ\text{C}$, cold start) <8A ² s ($T_{amb} = +50^\circ\text{C}$, cold start)
To be fused with a 16A, B-type 'circuit-breaker' switch based on the usual thermomagnetic overload sensing principle (used anyway to fuse the input lines).	
Harmonic current emissions (PFC)	SL20.110: no SL20.111: acc. to EN 61000-3-2
Transient handling	Transient resistance acc. to VDE 0160 / W2 (750V / 1.3ms), for all load conditions.
Hold-up time	30ms at 24V/20A, AC 230Vin 30ms at 24V/20A, AC 120Vin 15ms at 24V/20A, AC 100Vin

Efficiency, Reliability etc.*

Efficiency	typ. 90% (AC 230V, 24V/20A)
Losses	typ. 53W (AC 230V, 24V/20A)
MTBF	519.000h acc. to Siemensnorm SN29500 (24V/20A, 230V, $T_{amb} = 40^\circ\text{C}$)
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2). High reliability, as • only five aluminium electrolytics and • no small aluminium electrolytics are used.

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet

Output

Output voltage	DC 24...28V, adjustable by (covered) front panel potentiometer. Adjust. range guaranteed
Output noise suppression	EN 61000-6-3 (class B) is fulfilled even when using long, unscreened output cables
Ambient temperature range T_{amb}	Operation: $0^\circ\text{C}...+70^\circ\text{C}$ (> 60°C : Derating) Storage: $-25^\circ\text{C}...+85^\circ\text{C}$
Rated continuous loading with convection cooling:	
• $T_{amb}=0^\circ\text{C} - 60^\circ\text{C}$	24V/20A resp. 28V/18A short-term (<30s) 24V/25A resp. 28V/22A
Derating	12W/K (at $T_{amb} = 60-70^\circ\text{C}$)
Voltage regulation	better than 2% over all
Ripple	(incl. spikes (20MHz bandw.), 50Ω measurem.)
• Output charact. S	<20mV _{pp} (<0.1%)
• Output charact. P	<40mV _{pp} (In: AC 230V, Out: 24V/20A)
(S/P: Single/Parallel Mode)	<100mV _{pp} (In: AC 184V, Out: 24V/20A)
Over-voltage protection	At $31V \pm 3\%$: switch to hiccup mode
Front panel indicators:	
• Green LED on, when $V_{out} > U_T$, where U_T is appr. 2V below V_{out} adjusted (24V...28V)	
• Red LED on, when $V_{out} < U_T$	
Parallel operation	Yes, up to ten SL20
To achieve current sharing:	
• Plug jumper into pos. 'Output parallel use'. This alters the output V/I characteristic to be 'softer' (25V at 0.4A, 24V at 20A). The output voltage can still be adjusted.	
• Missing jumper = 'parallel use', i.e. 'soft' characteristic	
Power back immunity	max. 30V

Construction / Mechanics*

Housing dimensions and Weight

- W x H x D 220mm x 124mm x 102mm (+ DIN rail)
- Free space for above/below 70mm recommended
- ventilation left/right 25mm recommended
- Weight 1.8kg (SL20.110) resp. 2.5kg (SL20.111)

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- PVC insulated cable can be used for all connections, as the connection blocks are mounted in the cooler area on the underside of the unit.

Order information

Order number	Description
SL20.110 (without PFC) SL20.111 (including PFC)	SLZ02 (wall mounting set; contains 2 pcs.)

Start / Overload Behaviour

Startup delay typ. 0.55s

Rise time appr. 20-80ms, depending on load

Overload behaviour (see characteristic on the right)

- Power Boost: Short-term (<30s) 125% output power without voltage drop.
- Electronic current limiting, protects from overload and short-circuit.
- High overload/short-circuit behaviour ($V_{out} < 14V$) switchable between PULS Overload Design and hiccup mode. Switching by jumper on bottom of the unit; it is not necessary to open the unit for this purpose.

PULS Overload Design™ (continuous current):

- No disconnection/hiccup, thus overloading is possible also for a longer period of time (load start-up), ideal for parallel operation.
- High overload/short-circuit current due to straight characteristic; each bias point of the V/I characteristic extends 20A.

Advantage: Due to the high and continuously supplied overload current the unit starts reliably even with awkward loads (DC-DC converters, motors). No 'sticking' such as can occur with fold-back characteristics, and secondary fuses trigger more reliably.

Hiccup mode:

- Unit switches off when high overload occurs ($V_{out} < \text{appr. } 14V$) with subsequent periodical switch-on attempts (hiccup mode):
 - Duration of switch-on attempts: appr. 0.1s at short-circuit or appr. 1s at overload
 - Duration between switch-on attempts: appr. 1.5s
- $V_{out} > \text{appr. } 14V$: The output current is continuous. The V/I characteristic equals that of the PULS Overload Design™; each bias point of the V/I characteristic extends 20A.

Further information


Further information, especially about

- EMC
 - Connections
 - Safety, Approvals
 - Mechanics und Mounting,
- see page 2 of the „The SilverLine“ data sheet


For detailed dimensions

see SilverLine mechanics data sheet SL20


Output characteristic (typ.)

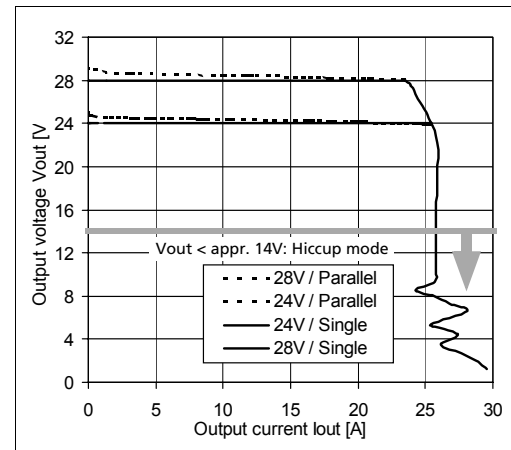

Efficiency (typ., at $V_{out}=24V$)

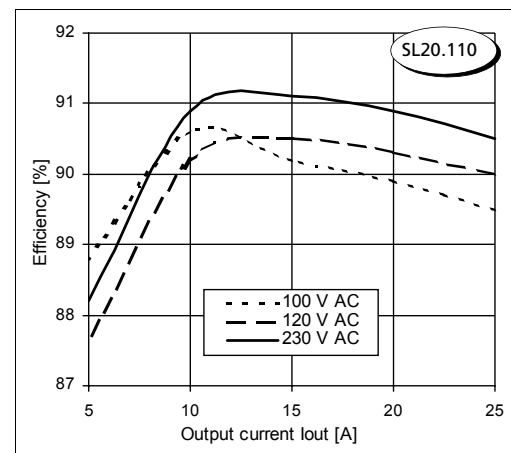

Hold-up time (min., at $V_{out}=24V$)

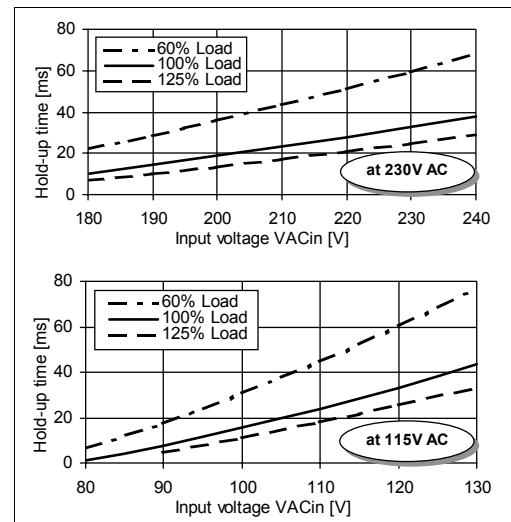

Unless otherwise stated, specifications are valid for AC 230V input voltage, +25°C ambient temperature, and 5 min. run-in time. They are subject to change without prior notice. All data is valid for the SL20.110. Regarding the SL20.111 (including PFC) some values may differ (please contact us if necessary).

Your partner in power supply:



European
Power Supply
Manufacturers
Association



Bayerns Best 50
Czech 100 Best
Europe's 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com


SL20

- Innovative DIN-Rail mount, unit holds even at vibration or lateral pressure
- Clearly arranged and user oriented
- Large, robust screw terminals
- Sealed metal housing
- Fine ventilating grid




Data sheet


Front view SL20.300

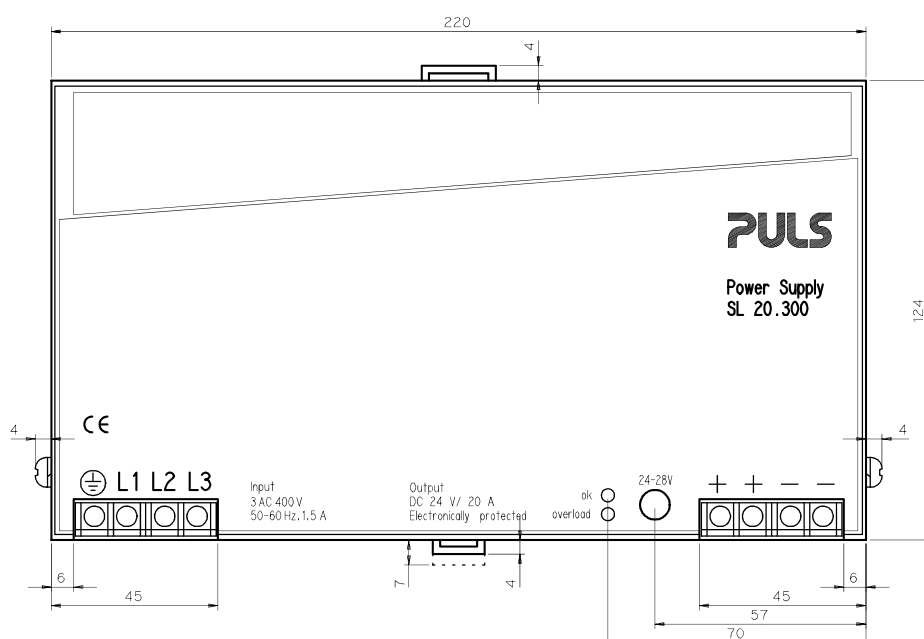

Input terminals SL20.1xx



Output terminals SL20.115

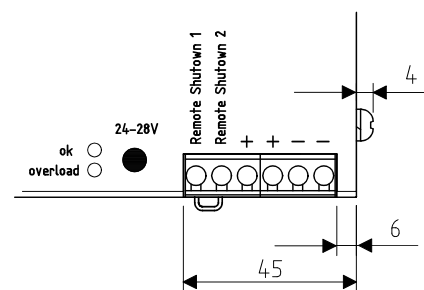

Construction / Mechanics

Housing dimensions and Weight

- W x H x D 220 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for above/below 70 mm recommended ventilation left/right 25 mm recommended
- Weight 1.5 kg (SL20.100) / 1.8 kg (SL20.110, SL20.300) 2.5 kg (SL20.111, SL20.115)

Robust metal housing with fine ventilat. grid (Δ 3,5 mm, IP20), to keep out small parts (e.g. screws)

Mounting on DIN-Rail (TS35/7.5 or TS35/15, 1...1.5 mm thick) therefore

- Simple snap-on system
- Sits safely and firmly on the DIN-Rail
- No tools required to remove

or backplane-mounted (two optional screw mounting sets SLZ01 required)

Connections

Connections

- Input/Output
- Current handling capacity
- Grid

Screw terminals, connector size range:

solid 0.5- 6 mm² / flexible 0.5 - 4 mm²

30 A per output

Two connectors per output, 9 mm (SL20.115: 6 mm) distance between adjacent connectors

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel. Input/output strictly apart from each other, thus no mixing up
- PVC insulated cable can be used for all connections, no thermal protection is needed

Order information


Order number

SL20.100 / .101
SL20.110 / .111
SL20.115
SL20.300 / .301
SLZ01


Description

AC 230 V, no PFC / incl. PFC
Auto select, no PFC / incl. PFC
Auto select, remote switch-off
3 AC 400 V / 3 AC 480 V
Screw mounting set, two needed per unit

Input terminals
SL20.1xx bottom view




Input terminals
SL20.30x bottom view

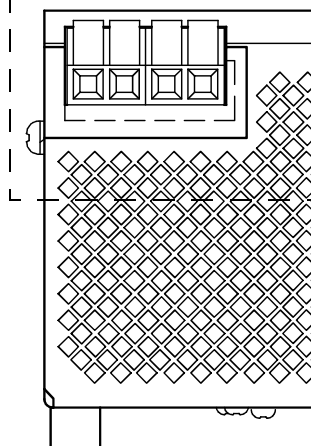


only SL20.110/.111


**Bottom view
SL20**

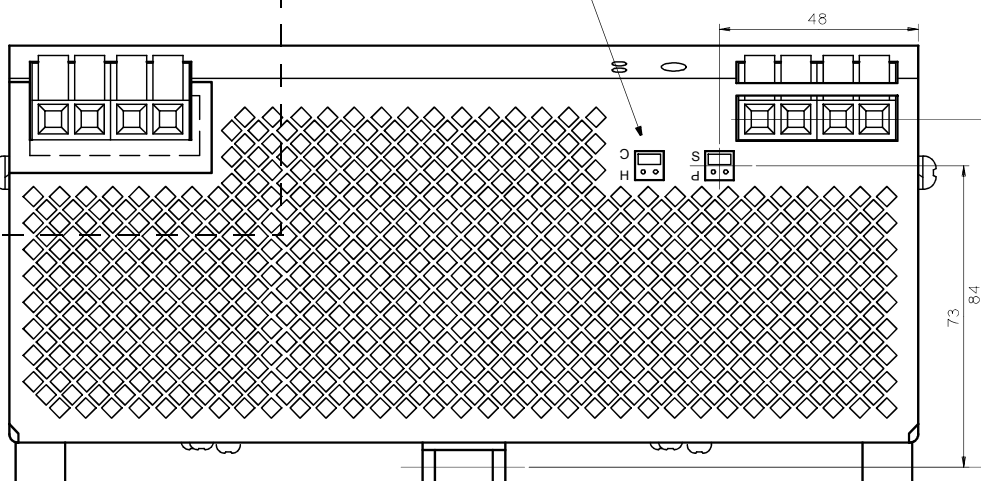

Side view SL20

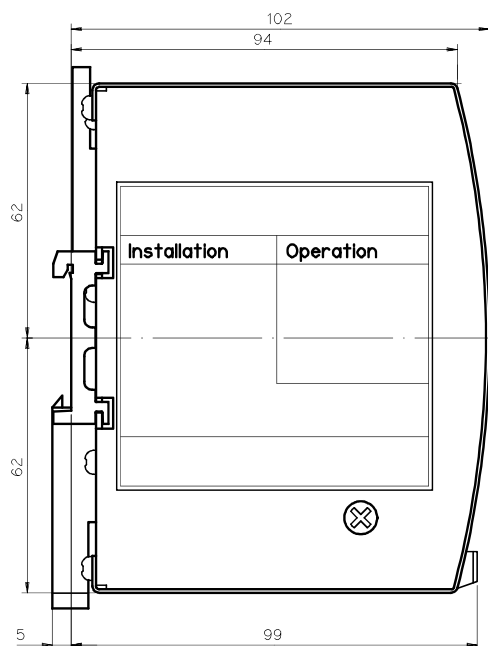

Output terminals
SL20.115 bottom view

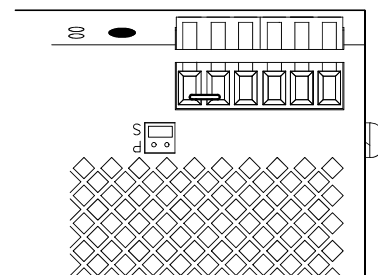

This 'mechanics data sheet' exclusively deals with the mechanical properties of the product. For further information (especially concerning electrical properties), please refer to the generic data sheet of the SL20 and to the basic data sheet „The SilverLine“ dealing with common features of all SilverLine units. This datasheet is subject to change without prior notice

Your partner in power supply:



Bayerns Best 50
Czech 100 Best
EuropeOs 500

PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com